



A stimulus package
for ultimate growth




The ultimate growth tool for print professionals

The EFI™ Pro 16h LED UV hybrid inkjet printer has been strategically designed with a complete stimulus package of features to assure the lowest total cost of ownership, superior image quality, and access to the widest range of substrates/applications.

The ultimate stimulus package of features:

- Hybrid inkjet platform prints flexible and rigid substrates up to 165 cm wide and 5.08 cm thick
- Powerful LED technology for lower operating costs, a wider range of printable substrates, and multiple environmental benefits
- Four colours plus white ink printing and single-pass, multilayer printing for greater profit opportunity
- Up to 1200 x 1200 dpi and near-photographic images, saturated colours, and smooth gradations with true four-level, variable-drop greyscale print capability
- Production quality printing at 29 m²/hr for faster job turns
- A choice of EFI ProGraphics Series UV Inks to best meet your application needs:
 - EFI - 3M™ ProGraphics UV ink for a wide range of flexible applications, including those that need to be stretched or heated or require the 3M™ MCS™ Warranty²
 - EFI ProGraphics UV POP inks for the most diverse range of rigid board and flexible media printing of indoor and outdoor applications
- Includes an embedded EFI Fiery® proServer digital front end, featuring FAST RIP acceleration technology, plus RIP and print-on-demand functionality, or the ability to print pre-ripped files at the printer interface

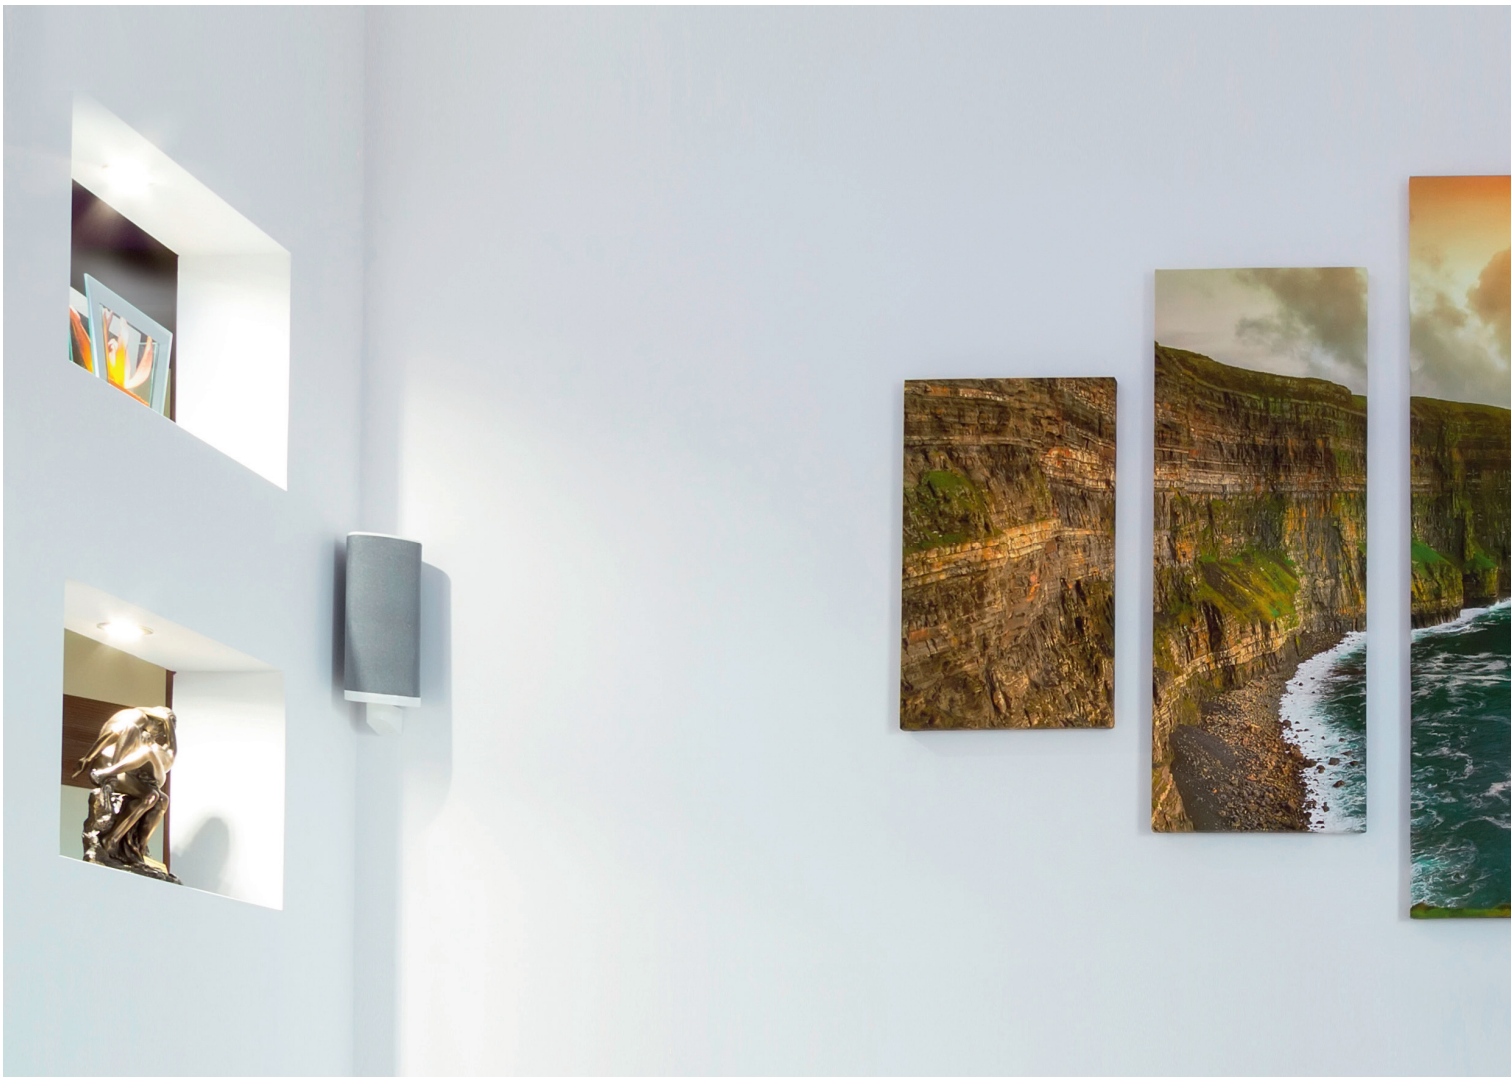

The power of green LED technology




From the leaders in production-level LED inkjet printing, EFI's brilliantly designed "cool cure" LED curing technology empowers you with the ability to do more for less. Increase your profit opportunity by offering more premium-margin jobs while reducing operating costs and your environmental footprint:

- Extends your range of supported substrates, including lower cost and added-value speciality media
- Increases uptime and productivity with instant on/off and less maintenance
- Drives down operating costs with less energy consumption and fewer consumable parts
- Reduces waste with consistent colour output and simple operation
- Satisfies customer requests for a greener print solution with low VOCs, lower power consumption, and less waste and consumables

¹ EFI ProGraphics Series UV Inks are NOT top loadable and require a simple change-over kit to move from one ink set to the other.

² The 3M™ MCST™ Warranty backs graphics printed with 3M co-branded ink and select 3M flexible media, printed and applied according to 3M product and instruction bulletins. See www.3Mgraphics.com/warranties to register and for more details.

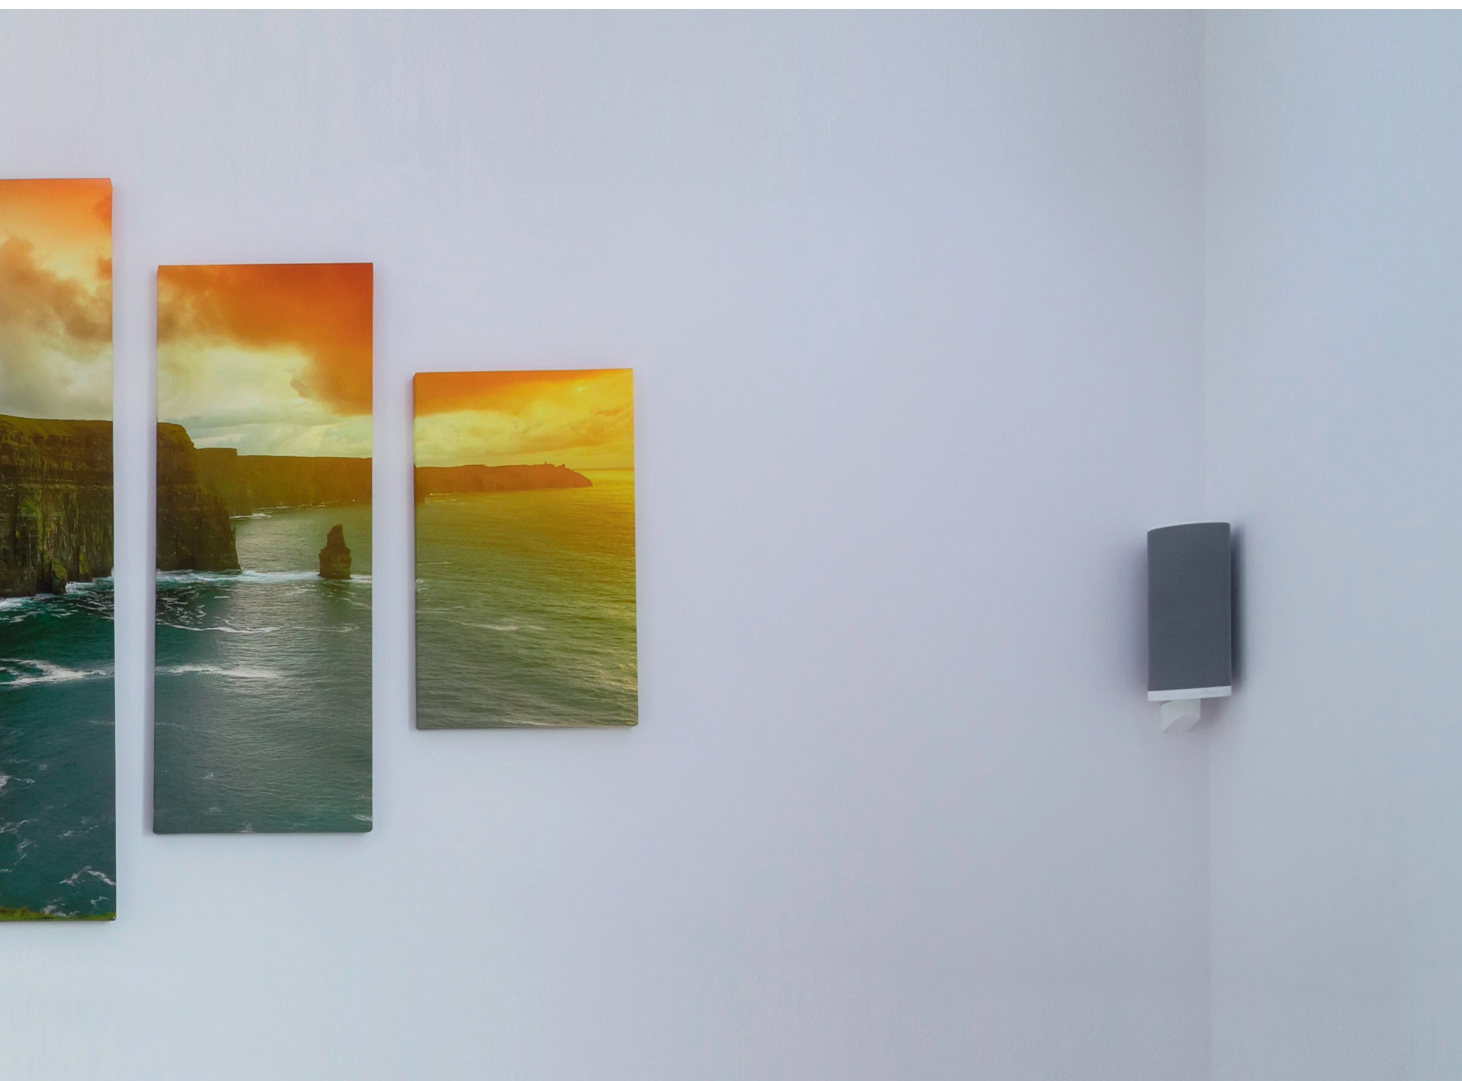

EFI Pro 16h

Features and benefits

- Standard: CMYK plus two white channels
- Dynamic-curing LED UV lamps
- Up to 90.7 m²/hr
- Up to 1200 x 1200 dpi
- Up to four levels of variable-drop geyscale
- EFI ProGraphics Series UV Inks
- Integration ready with EFI web-to-print and MIS/ERP solutions with native JDF connectivity
- Ships with an embedded EFI Fiery proServer digital front end
- RIP and print on demand, or print pre-ripped files at the printer interface
- One-year Enhanced Service Program (ESP) warranty covers your printer, embedded Fiery proServer, and Fiery XF software
- Twelve months of Essential level coverage — three-business-day response

Media/handling

- Handles flexible and rigid substrates up to 165 cm wide and 5.08 cm thick
- Image width of 162.6 cm full-bleed printing
- Vacuum belt drive system with variable control
- Maximum rigid and roll media weight of 45.4 kg
- Maximum roll diameter of 22.9 cm
- Modular table design for scalable rigid printing depth

Productivity

- Ultra Quality Mode 5.6 m²/hr
- High Quality Mode 11 m²/hr
- POP Quality Mode 16.5 m²/hr
- Production Mode 29 m²/hr
- Distant View/Outdoor Mode 53 m²/hr
- Express Mode 90.7 m²/hr
- White printing, one-half CMYK speeds

Formats

- All popular desktop files formats, including PostScript® 3™, EPS, TIFF, PDF, and RGB/CMYK

Environmental considerations

- Temperature: 18 °C - 26.7 °C
- Humidity: 20% - 80% (non-condensing)
- Weight: 1,235 kg, including tables and rollers
- Dimensions (W x D x H) with one set of tables: 348 cm x 241 cm x 163 cm
- Depth: 138 cm without tables or rollers, 241 cm with tables
- Electrical: 208–240 VAC, single phase, 50/60 Hz, 30 Amps

EFI fuels success.

We develop breakthrough technologies for the manufacturing of signage, packaging, textiles, ceramic tiles, and personalised documents, with a wide range of printers, inks, digital front ends, and a comprehensive business and production workflow suite that transforms and streamlines the entire production process, increasing your competitiveness and boosting productivity.

Visit www.efi.com or call 0808 101 3484 (UK only) or +44 (0)1246 298000 (UK), or +61 (0) 7 3625 9200 (ANZ and Asia Pacific) for more information.



Nothing herein should be construed as a warranty in addition to the express warranty statement provided with EFI products and services.

The APPS logo, AutoCal, Auto-Count, Balance, BESTColor, BioVu, BioWare, ColorPASS, Colorproof, ColorWise, Command WorkStation, CopyNet, Cretachrom, Cretaprint, the Cretaprint logo, Cretaprinter, Cretaroller, Digital StoreFront, DocBuilder, DocBuilder Pro, DockNet, DocStream, DSFdesign Studio, Dynamic Wedge, EDOX, EFI, the EFI logo, Electronics For Imaging, Entrac, EPCount, EPPhoto, EPRegister, EPStatus, Estimate, ExpressPay, FabriVu, Fast-4, Fiery, the Fiery logo, Fiery Driven, the Fiery Driven logo, Fiery JobFlow, Fiery JobMaster, Fiery Link, Fiery Navigator, Fiery Prints, the Fiery Prints logo, Fiery Spark, FreeForm, Hagen, InkIntensity, Inkware, LapNet, Logic, Metrix, MicroPress, MiniNet, Monarch, OneFlow, Pace, Pegasus, Pegasus Vision, PhotoXposure, PressVu, Printcafe, PrinterSite, PrintFlow, PrintMe, the PrintMe logo, PrintSmith, PrintSmith Site, PrintStream, Print to Win, Prograph, PSI, PSI Flexo, Radius, Remoteproof, RIPChips, RIP-While-Print, Screenproof, SendMe, Sincolor, Splash, Spot-On, TrackNet, UltraPress, UltraTex, UltraVu, UV Series 50, VisualCal, VUTEK, the VUTEK logo, and WebTools are trademarks of Electronics For Imaging, Inc. and/or its wholly owned subsidiaries in the U.S. and/or certain other countries.

All other terms and product names may be trademarks or registered trademarks of their respective owners, and are hereby acknowledged.